

# CPP330/ACM

## 48x40 (Standard) Plastic Industrial Pallet



### Technical Data

Dimensions 48x40x5.5 inches (1219x1016x140 mm)  
Weight 22.0 lbs

#### Load Capacities

Static 8800 lbs  
Dynamic 3100 lbs  
Racking --

Entry 4-way  
Truckload Qty 1620  
Stack TL 54

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> Yes	<b>Reusability</b> One-Way	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> No	<b>Destination</b> Export	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> No	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

### Materials and Colors

**Condition**  
New

**Material**  
ACM (Recycled)

**Color**  
Black

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
9 Feet - Nesting

#### Available Options:

CPP330 - No skids (nestable)  
CPP333 - 3 Runner snap-on skids\*  
CPP336 - 6 Runner snap-on skids\*  
\*Order with skids off for lower shipping cost

### Features

- Lightweight and low height
- Nesting saves storage & shipping costs
- Low-cost Plastic Pallet
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



**Nelson**<sup>TM</sup>

The Nelson Company  
(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)


[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# CPP330/ACM



48x40 (Standard)  
Plastic Industrial Pallet



## Technical Drawings

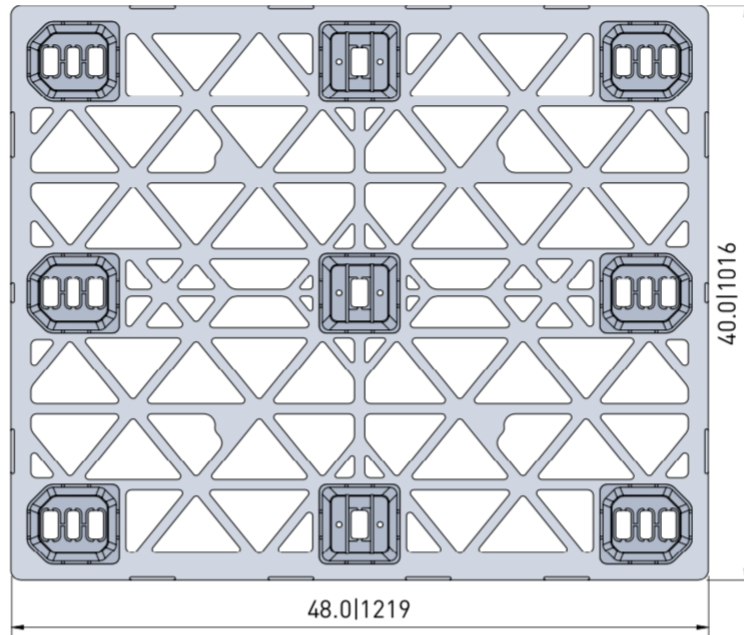

9F

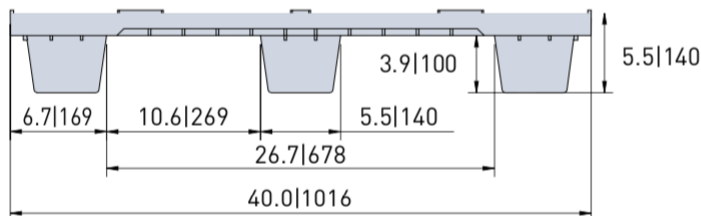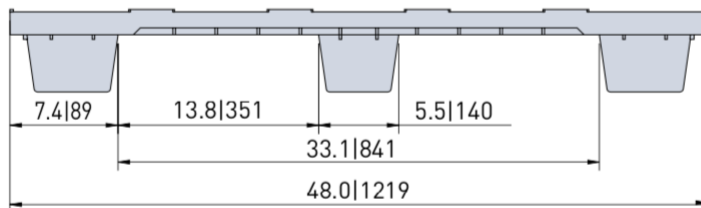

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Tech Sheet Generated On: 6/1/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.