# CPP100/ACM

### 48x40 (Standard) **Plastic Industrial Pallet**

#### **Technical Data**

Dimensions Weight	
Load Capacities	

Static

Dynamic

Racking

3500 lbs 2200 lbs

12.0 lbs

Entry Truckload Qty Stack TL

4-way 2340 78

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

48x40x5.2 inches (1219x1016x132 mm)

#### Handling Data

Nestable Yes Stackable No

Rackable

No

Reusability One-Way Destination Export Airfreight

Yes

**ISPM-15** Exempt Yes

**Food Grade** Yes, non-FDA

Pharmaceutical Yes





#### **Materials and Colors**

Condition New

Material ACM (Recycled)

Color Black

#### **Deck Specs**

**Top Deck** Open


**Bottom Deck** 9 Feet - Nesting

Available Options: No skids (open) = CPP100 No skids (closed) = NPP-4840-N-100#CD 3 Runner snap-on skids\* (open) = CPP103 3 Runner snap-on skids\* (closed) = NPP-4840-3R-100#CD

- \*Order with skids off for lower shipping

#### **Features**

- . Lightweight and low height
- Nesting saves storage & shipping costs
- Low-cost Plastic Pallet
- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

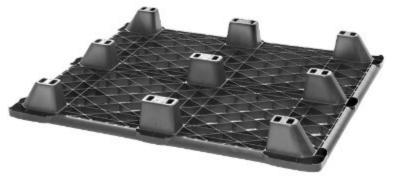




Spec Sheet Generated On: 5/20/2024


Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.


## CPP100/ACM

48x40 (Standard) Plastic Industrial Pallet

### **Technical Drawings**

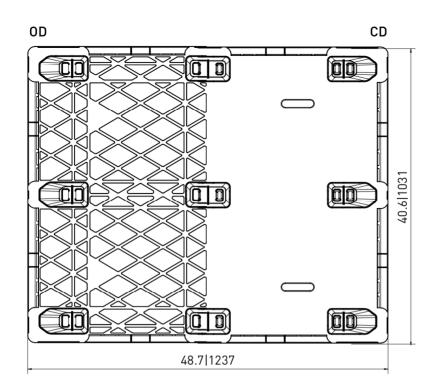

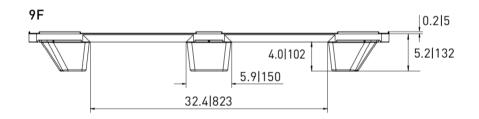

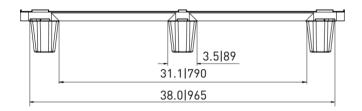



Tech Sheet Generated On: 5/20/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

