

# NPP-4840-FP-PSG6.2

## 48x40 (Standard) Plastic Industrial Pallet



### Technical Data

Dimensions 48x40x6.25 inches  
Weight 45 lbs

#### Load Capacities


Static 20000 lbs  
Dynamic 5000 lbs  
Racking 2200 lbs

Entry 4-way  
Truckload Qty 510  
Stack TL / LTL 17 / 15

TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> No	<b>Reusability</b> One-Way & Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> Yes	<b>Destination</b> Captive & Export	<b>Food Grade</b> FDA Approved
<b>Rackable</b> Yes	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

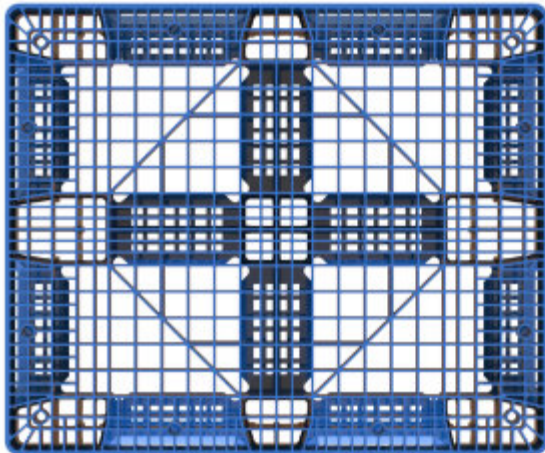

### Materials and Colors

**Condition**  
New

**Material** HDPE  
**Color** Blue

(Virgin High-Density Polyethylene)

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
6 Runner - Perimeter+2 Cross  
(cruciform perimeter base)

**Available Options**  
3 Stringer  
Hotstamp or Molded-in Logo  
Barcode and RFID  
Interrupted Perimeter Lip  
Grommets

### Features

One-Piece, hygienic, flow-through design is easy to inspect. Built for safe transportation and storage of food and pharmaceutical products + washing applications.

- Non-Halogen, FM Approved, FDA Compliant
- 4-way entry for forklift and pallet jacks
- Edge-Rackable up to 2,200 lbs
- Allows for safe double stacking
- Sanitary choice for strict drug manufacturing requirements
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)


[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# NPP-4840-FP-PSG6.2

48x40 (Standard)  
Plastic Industrial Pallet



## Technical Drawings

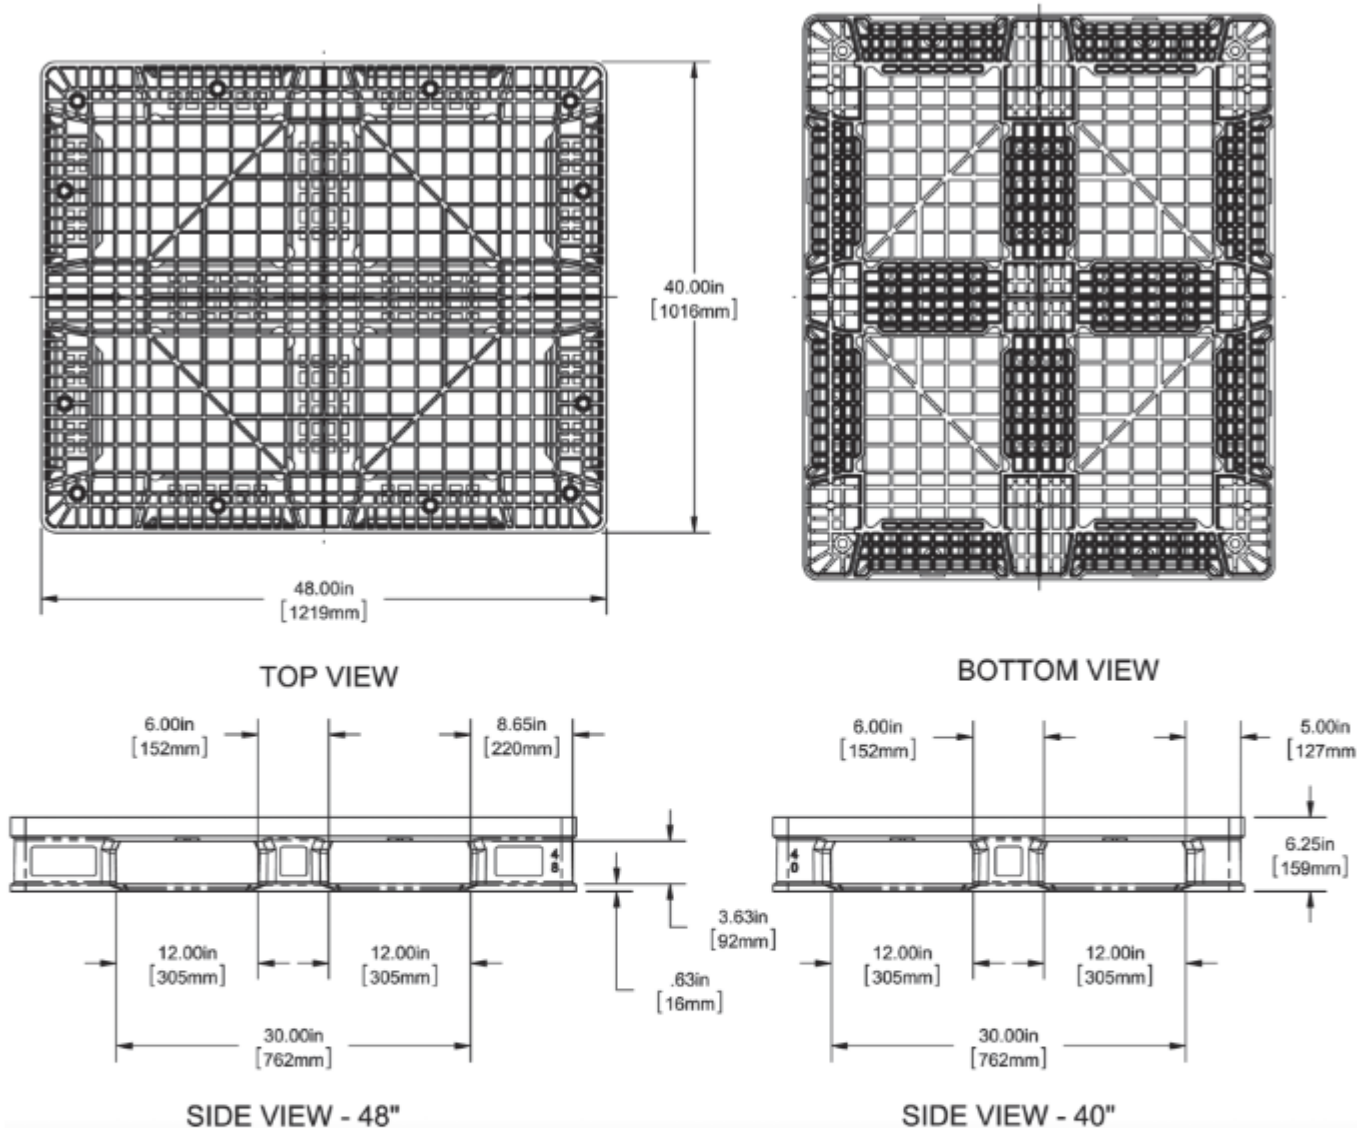

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Tech Sheet Generated On: 5/20/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.