

# UP-4840-N-320ACMCD

## 48x40 (Standard) Plastic Industrial Pallet



### Technical Data

Dimensions 48x40x5.5 inches (1219x1016x140 mm)  
Weight 23.0 lbs

#### Load Capacities

Static 8800 lbs  
Dynamic 2800 lbs  
Racking --

Entry 4-way  
Truckload Qty 1800  
Stack TL 60

Load capacities for used pallets may be unavailable or may have changed since issued. Unit load Sample Tests (ST) are recommended to confirm successful use with specific applications and equipment. TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> Yes	<b>Reusability</b> One-Way	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> No	<b>Destination</b> Export	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> No	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

### Materials and Colors

**Condition**  
**Used**

**Material**  
ACM (Recycled)

**Color**  
Varies

Colors and manufacturers vary and orders may be mixed. To avoid return freight charges ask your Sales Rep about special requests. All used pallets have been inspected and cleaned. Pallets may have limited cosmetic damage, but all are structurally sound.

### Deck Specs


**Top Deck**  
Closed

**Bottom Deck**  
9 Feet - Nesting

### Features

Structurally sound but slightly irregular pallets. Color varies (black, gray or light gray.) Some pallets have "short shots" (very small gaps where plastic didn't quite fill the mold).

- 13% more per stack (60 vs 52): less floor space, more in a truckload = less inbound freight
- Angled sides for easier fork time access when splitting the stack
- Notch on the side for stretch wrap hook
- New handle cut into the top deck for easier handling
- Nesting saves storage & shipping costs
- Low-cost Plastic Pallet
- Easy-to-clean hygienic design
- Suitable for packaged food items *(not approved for direct food contact)*
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

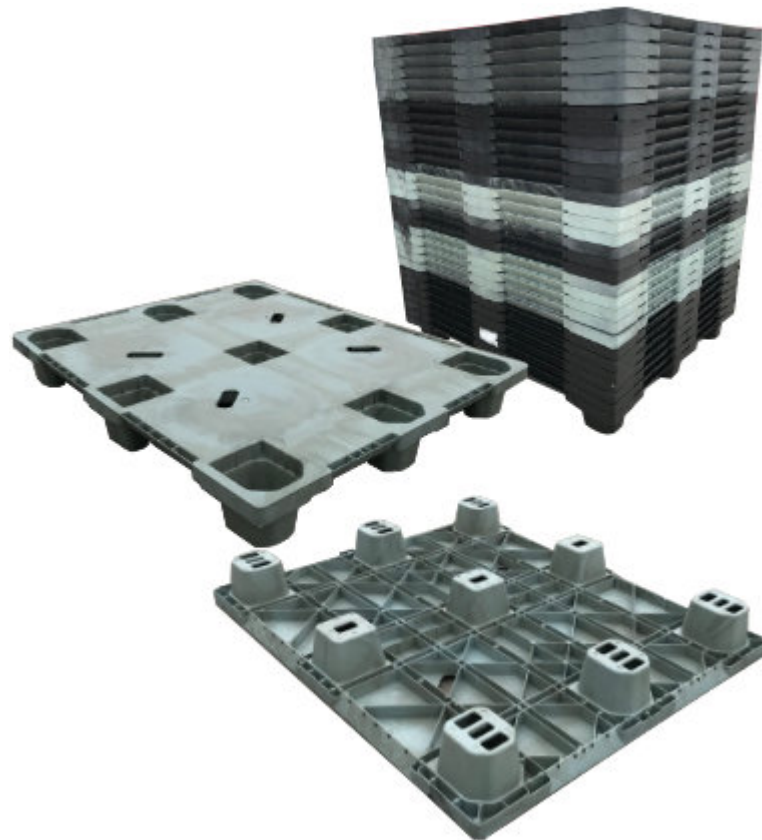

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)