

PG-4840-N-NPT

48x40 (Standard) Plastic Industrial Pallet



Technical Data

Dimensions	47.5x39.5x6 inches (1200x1000x152 mm)
Weight	18 lbs
Load Capacities	
Static	6600 lbs
Dynamic	3000 lbs
Racking	--
Entry	4-way
Truckload Qty	1620
Stack TL	58

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

Handling Data

Nestable Yes	Reusability One-Way & Multi-Trip	ISPM-15 Exempt Yes
Stackable No	Destination Export & Captive	Food Grade Yes, non-FDA
Rackable No	Airfreight Yes	Pharmaceutical Yes

Materials and Colors

Condition
New

Material
HDPE/PP (Recycled)
HDPE/PP (Virgin*)

Color
Black
Gray/Custom*

(High-Density Polyethylene/Polypropylene)

*Custom colors and markings available in virgin material.
(Minimum quantities required.)

Deck Specs


Top Deck
Open

Bottom Deck
9 Feet - Nesting

Available Options
Anti-Slip Inserts (shown in red)
Individual Markings

Features

- Temp 0 F to +172 F
- Nesting saves storage & shipping costs
- Easy-to-clean hygienic design
- Suitable for packaged food items
(not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

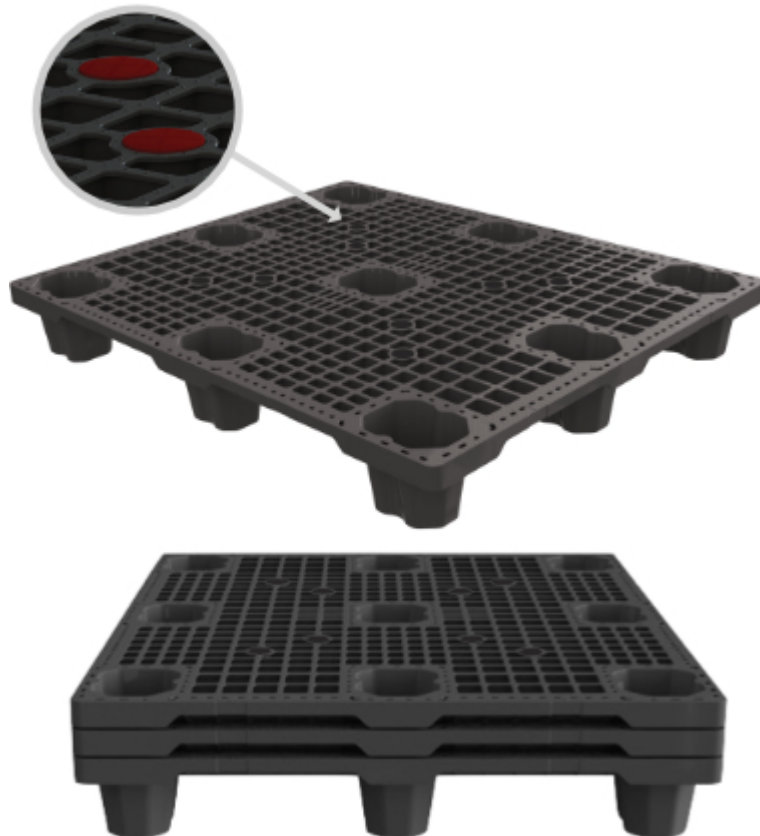

NelsonTM

The Nelson Company

(443) 649-5294

plastic@NelsonCompany.com

www.NelsonCompany.com





www.NelsonTechCenter.com

PG-4840-N-NPT

48x40 (Standard)
Plastic Industrial Pallet



Technical Drawings

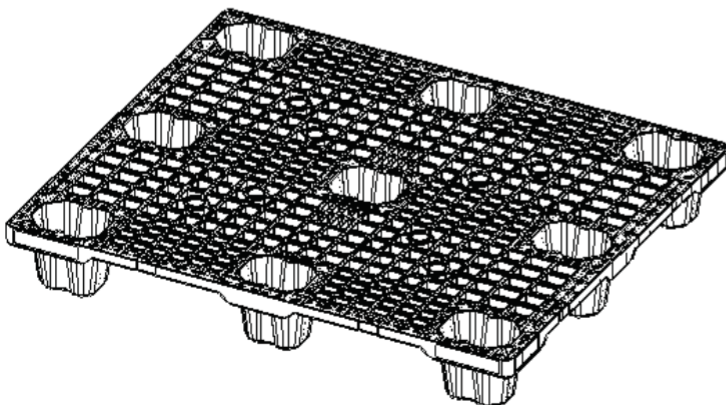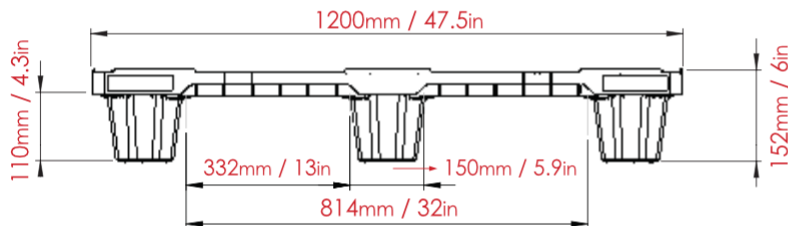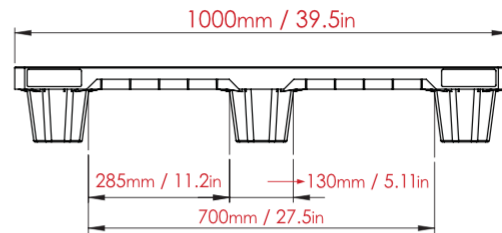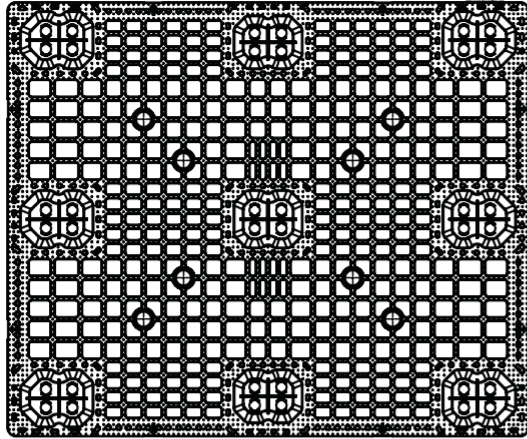

NelsonTM

The Nelson Company

(443) 649-5294

plastic@NelsonCompany.com

www.NelsonCompany.com

www.NelsonTechCenter.com

Tech Sheet Generated On: 5/20/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.