


# GL-4545-FP-45SQ

## 45x45 (Square) Plastic Chemical Pallet

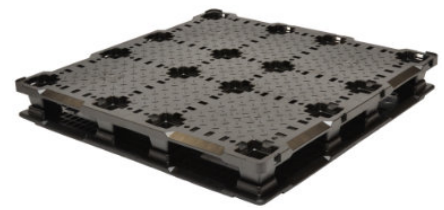

### Technical Data

Dimensions 45x45x5.5 inches  
Weight 37.0 lbs

#### Load Capacities


Static 8000 lbs  
Dynamic 3000 lbs  
Racking --

Entry 4-way  
Truckload Qty 494  
Stack TL / LTL 19 / 17

TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> No	<b>Reusability</b> One-Way & Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> Yes	<b>Destination</b> Captive & Export	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> No	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

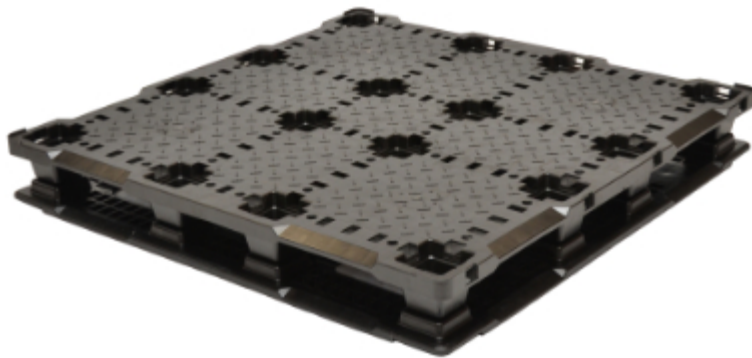

### Materials and Colors

**Condition**  
New

**Material** HDPE/PP (Recycled) **Color** Black

(High-Density Polyethylene/Polypropylene)

### Deck Specs

**Top Deck**  
Closed

**Bottom Deck**  
8 Runner - Perimeter+4 Cross

Available Options:  
Top deck nestable pallet can be sold separately

### Features

Lips on all 4 corners (with interchangeable inserts) for securing loads.

- A close match to the wooden CP9 Chemical Pallet
- Injection molded
- 2-piece design with interlocking base
- Stackable and conveyable
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Sanitary choice for strict drug manufacturing requirements
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294


[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)


[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# GL-4545-FP-45SQ

45x45 (Square)  
Plastic Chemical Pallet

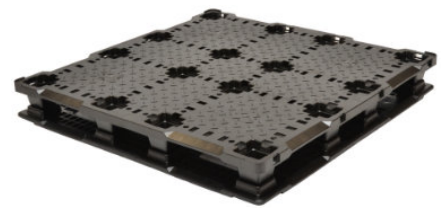

## Technical Drawings

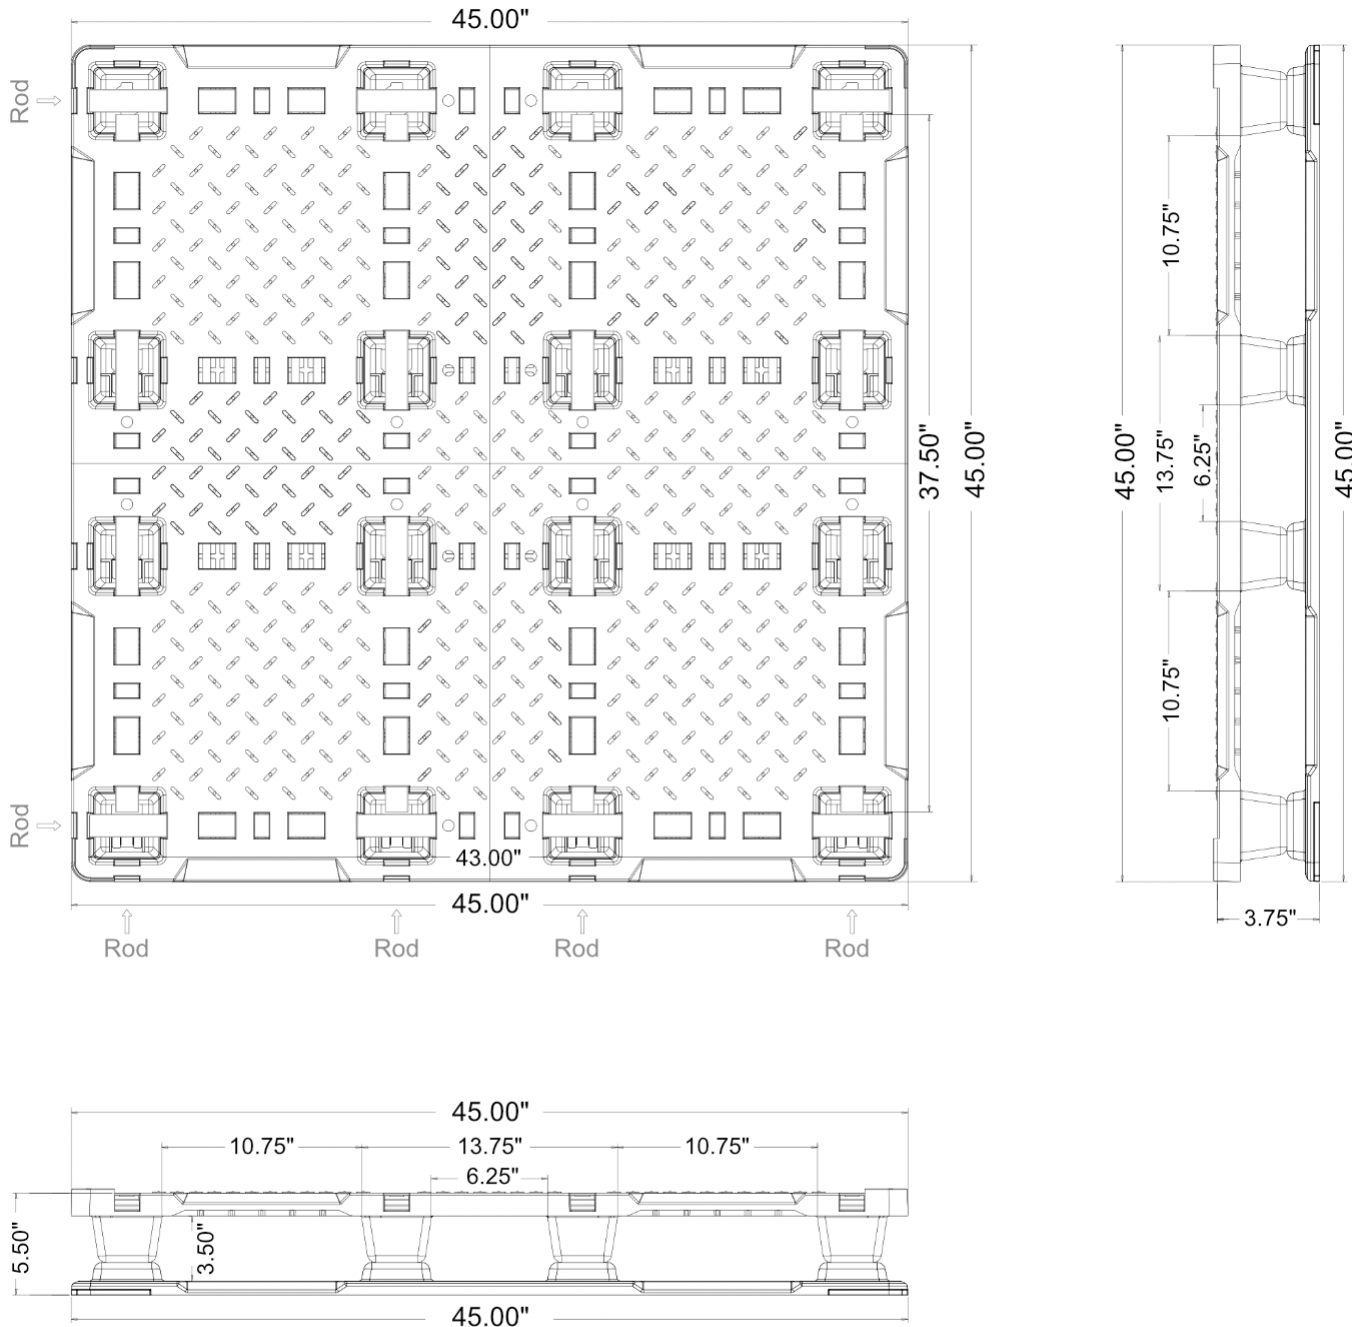

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Tech Sheet Generated On: 6/3/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.