# **CPP306/PE**

# 48x40 (Standard) **Plastic Industrial Pallet**

### **Technical Data**

Dimensions Weight

47.24x39.37x6.29 inches (1200x1000x160 mm) 33.0 lbs

<b>Load Capacities</b> Static Dynamic Racking	8500 lbs 4400 lbs 650 lbs
Entry	4-way
Truckload Qty	510
Stack TL / LTL	17 / 15

TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

## Handling Data

Nestable No

Stackable Yes

Rackable Yes

Reusability One-Way & Multi-Trip

Destination

Airfreight

Captive

No

**ISPM-15** Exempt Yes

**Food Grade** Yes, non-FDA

**Pharmaceutical** Yes







# **Materials and Colors**

Condition New

Material

HDPE/PP (Recycled)

HDPE/PP (Virgin\*)

Color Black Gray/Custom\*

(High-Density Polyethylene/Polypropylene)

\*Custom colors and markings available in virgin material. (Minimum quantities required.)

### **Deck Specs**

**Top Deck** Open

**Bottom Deck** 6 Runner - Perimeter+2 Cross (cruciform perimeter base)

Available Options: CPP300 - No skids (nestable) CPP303 - 3 Runner snap-on skids\* CPP306 - 6 Runner snap-on skids\* \*Order with skids off for lower shipping cost

#### **Features**

- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- . Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



Spec Sheet Generated On: 5/20/2024


Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.





48x40 (Standard) Plastic Industrial Pallet

# **Technical Drawings**



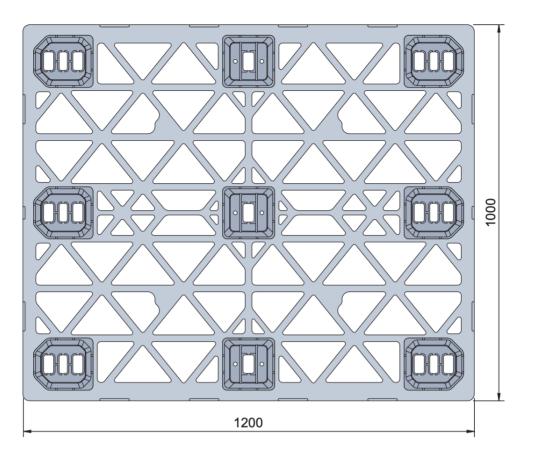

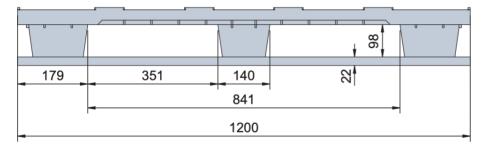

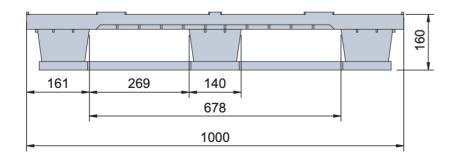

The Nelson Company (443) 649-5294 plastic@NelsonCompany.com www.NelsonCompany.com www.NelsonTechCenter.com

Tech Sheet Generated On: 5/20/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.