# ORC-4840-N-CISC

### 48x40 (Standard) Plastic Industrial Pallet

#### **Technical Data**

Dimensions	
Weight	

48.2x40.2x5.5 inches (1224x1021x140 mm) 22.0 lbs

Load Capacities
Static
Dynamic
Racking
Entry

2500 lbs --4-way

1290

43

15000 lbs

Truckload Qty Stack TL

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

#### Handling Data

Nestable Yes

Stackable

Rackable

- -

No

**Reusability** One-Way & Multi-Trip

> Destination Captive & Export

**Airfreight** Yes ISPM-15 Exempt Yes

Food Grade Yes, non-FDA

Pharmaceutical Yes



#### **Materials and Colors**

Condition New

Material	Color
HDPE/PP (Recycled)	Black

(High-Density Polyethylene/Polypropylene)

#### **Deck Specs**

Top Deck Open

Bottom Deck 9 Feet - Nesting

**Options** Grommets Hot Stamp Identification Plate Molded-in Logo Vinyl Labels Lip Inboard Lip Outboard

#### Features

- Ergonomic handles improve safety
- Optional deck and foot grommets minimize load shifting
- Nesting saves storage & shipping costs
- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



Spec Sheet Generated On: 5/19/2024


Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.



## ORC-4840-N-CISC

48x40 (Standard) Plastic Industrial Pallet

### **Technical Drawings**

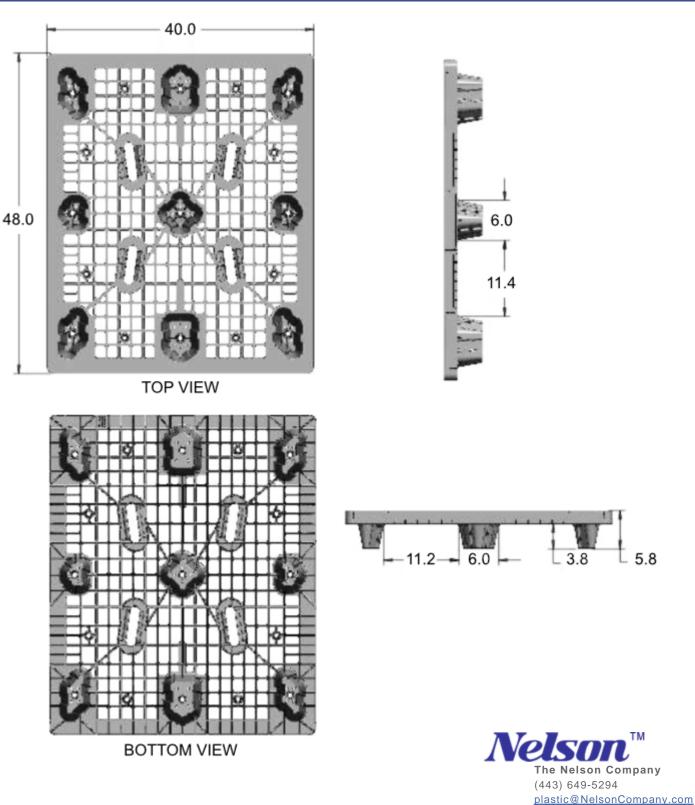



www.NelsonCompany.com www.NelsonTechCenter.com

Tech Sheet Generated On: 5/19/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.