

# UP-4840-FP-StrucCell

## 48x40 (Standard) Plastic Industrial Pallet



### Technical Data

Dimensions 48x40x5.1 inches  
Weight 44.5 lbs

#### Load Capacities


Static 30000 lbs  
Dynamic 4000 lbs  
Racking ST Req

Entry 4-way  
Truckload Qty 540  
Stack TL / LTL -- / 18

Load capacities for used pallets may be unavailable or may have changed since issued. Unit load Sample Tests (ST) are recommended to confirm successful use with specific applications and equipment. TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> No	<b>Reusability</b> Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> Yes	<b>Destination</b> Captive	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> Yes	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

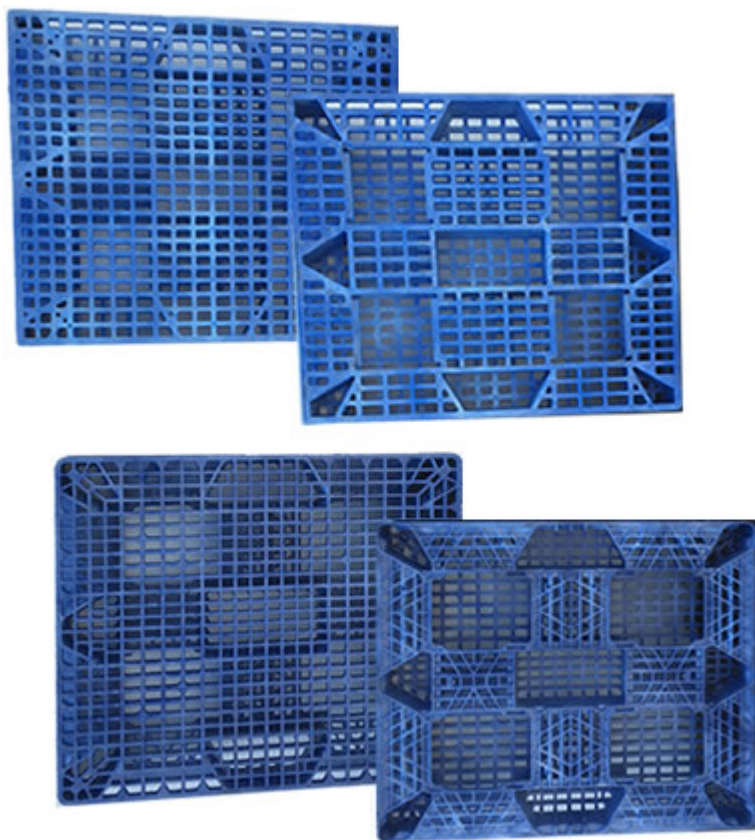

### Materials and Colors

**Condition**  
**Used**

**Material** HDPE  
**Color** Varies

(High-Density Polyethylene)

Colors and manufacturers vary and orders may be mixed. To avoid return freight charges ask your Sales Rep about special requests. All used pallets have been inspected and cleaned. Pallets may have limited cosmetic damage, but all are structurally sound.

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
6 Runner - Perimeter+2 Cross  
(cruciform perimeter base)

### Features

**Mixed load from 3 manufacturers:** Orbis, Cookson and Amoco. The Amoco and Cookson (top pic) are nearly identical. Orbis (bottom pic) has slightly different bottom pattern and side. All top decks, measurements and capacities are the same.

- Limited quantities. Will not get more. First come, first served.
- Very clean, great shape.
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

**Nelson™**

The Nelson Company  
(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)