CPP210/PE

48x32 (Euro) **Plastic Industrial Pallet**

Technical Data

D	İ	n	n	е	n	S	İC	۱r	۱S	
W	1	e	i	a	h	t				

47.2x31.5x5.5 inches (1200x800x140 mm) 17.5 lbs

Load Capacities Static Dynamic Racking	7100 lbs 2600 lbs
Entry	4-way
Truckload Qty	1976
Stack TL	52

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

Handling Data

Nestable Yes

Stackable No

Rackable No

Reusability One-Way & Multi-Trip Destination

Captive & Export

Airfreight Yes

ISPM-15 Exempt Yes

Food Grade Yes, non-FDA

Pharmaceutical Yes





Materials and Colors

Condition New

Material

HDPE/PP (Recycled)

HDPE/PP (Virgin*)

Color Black Gray/Custom*

(High-Density Polyethylene/Polypropylene)

*Custom colors and markings available in virgin material. (Minimum quantities required.)

- - - - - - - - - - - - -

Deck Specs

Top Deck Open

Bottom Deck 9 Feet - Nesting

Available Options: CPP210 - No skids (nestable) CPP220 - 3 Runner snap-on skids* *Order with skids off for lower shipping cost

Features

- Standard size used across EU
- Design is popular in rail freight applications
- Nesting saves storage & shipping costs
- Easy-to-clean hygienic design
- Suitable for packaged food items (not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- . Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations




Spec Sheet Generated On: 4/16/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.





48x32 (Euro) Plastic Industrial Pallet

Technical Drawings

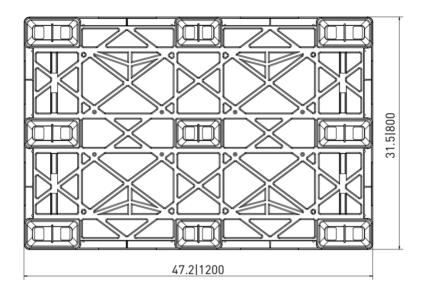

9F | 0.2 in safety rim

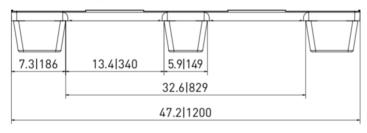

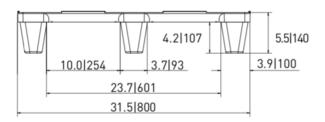



Tech Sheet Generated On: 4/16/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

