

CPP 4840-AC **48" x 40"** Industrial Pallet



Send & Forget

Technical Data:

CPP 4840-AC ACM - Light-Duty

Load Capacity* ¹		Dimensions* ²	48" x 40" x 5.1"
Static	5500 lbs	Weight* ²	17.0 lbs
Dynamic	1300 lbs	Material	ACM, recycled material
Racking	—	Color	black
		Bottom Support	9 feet
		Entry	4-way
		Safety Rim	0.3" (all around)
		Nesting Height	2.0"

*¹ Guideline values, based on experience and partly ISO tests ISO 8611 which represent an evenly distributed load at room temperature of 68°F (20°C). Varying data may result from different conditions of usage. We check your requirements on request. *² The pallet dimensions and weight are variable.

Safe and clean storage of light-weight products.



CPP 4840-AC in nursery.



Easy handling with forklift.



One-Way - ACM



Nestable one-way pallet for transport and storage of light goods

- > Cost effective
- > Light weight and low height
- > Extraordinary weight-to-load capacity ratio
- > Easy and safe to handle
- > Excellently suited as air cargo pallet
- > Reduced freight charge by volume saving: 34 pallets = 6 ft. height
- > Resistant to insects, bacteria and fungi
- > No siren treatment required
- > Environmentally friendly product of 100% regenerated plastics, completely recyclable

> Options

—

> Additional Material Versions

—

We reserve the right to change any of the stated information without prior notice.



CABKA | North America

Distributor:

The Nelson Company

phone +1 410. 477. 3000, x. 118


fax +1 410. 477. 3577

e-mail service@nelsoncompany.com

www.nelsoncompany.com

CPP 4840-AC

48" x 40" Industrial Pallet

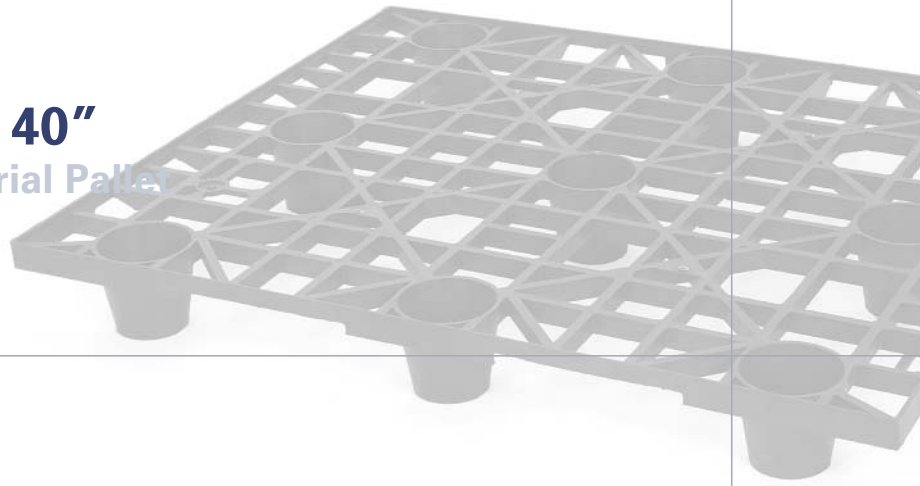

CPP

Cabka Plast meets the high standard of ISO 9001:2000. Our certified quality management comprises both the manufacturing of our products and the cooperation with our customers.

In addition to that CPP plastic pallets are regularly tested in accordance with the relevant elements of the standard ISO 8611.

All this guarantees our permanent quality to meet the demands of the market and the customers.

Cabka Plast products are manufactured in Germany, Israel and North America, giving our customers, wherever they are, a crucial advantage in being able to choose the shortest, fastest and cheapest route for

product to market.

Our wide range of plastic pallets provides solutions for the most diverse areas of application. Our development department and our own tool design and construction enables us to satisfy even fancy requirements of our customers. Do profit by the decades of our experience.

QUALITY
MANAGEMENT
Certificate
Voluntary participation in regular
monitoring according to ISO 9001:2000



Overview of Available Material Versions

CPP 4840-AC	Material	Load Capacity* ¹ [lbs]			Weight* ² [lbs]	
		Static	Dynamic	Racking		
One-Way	ACM, recycled material Details in kg:	5500	1300	—	17.0	
		2500	600	—	8.0	

*¹ Guideline values, based on experience and partly ISO tests ISO 8611 which represent an evenly distributed load at room temperature of 68°F (20°C). Varying data may result from different conditions of usage. We check your requirements on request. *² The pallet dimensions and weight are variable. *⁴ This material is also available in virgin material. Equal load capacities and weight.

