

# PS-4840-N-Dist

## 48x40 (Standard) Plastic Distribution Pallet



### Technical Data

Dimensions	48x40x6.5 inches (1219x1016x165 mm)
Weight	29 lbs
<b>Load Capacities</b>	
Static	30000 lbs
Dynamic	3000 lbs
Racking	--
Entry	4-way
Truckload Qty	1200
Stack TL	40

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> Yes	<b>Reusability</b> One-Way & Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> --	<b>Destination</b> Captive & Export	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> No	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

### Materials and Colors

<b>Condition</b> New	
<b>Material</b> HDPE	<b>Color</b> Black
(High-Density Polyethylene)	

### Deck Specs

**Top Deck**  
Closed

**Bottom Deck**  
9 Feet - Nesting

Available Options:  
Coditherm Barcoding  
Grommets (top and bottom)  
Virgin Blue (PS-4840-N-DistFDA)

### Features

- Textured anti-slip surface
- Anchor notch for easy stretch wrap application
- Nesting saves storage & shipping costs
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Sanitary choice for strict drug manufacturing requirements
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



**Nelson™**

The Nelson Company  
(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)


[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# PS-4840-N-Dist

48x40 (Standard)  
Plastic Distribution Pallet



## Technical Drawings

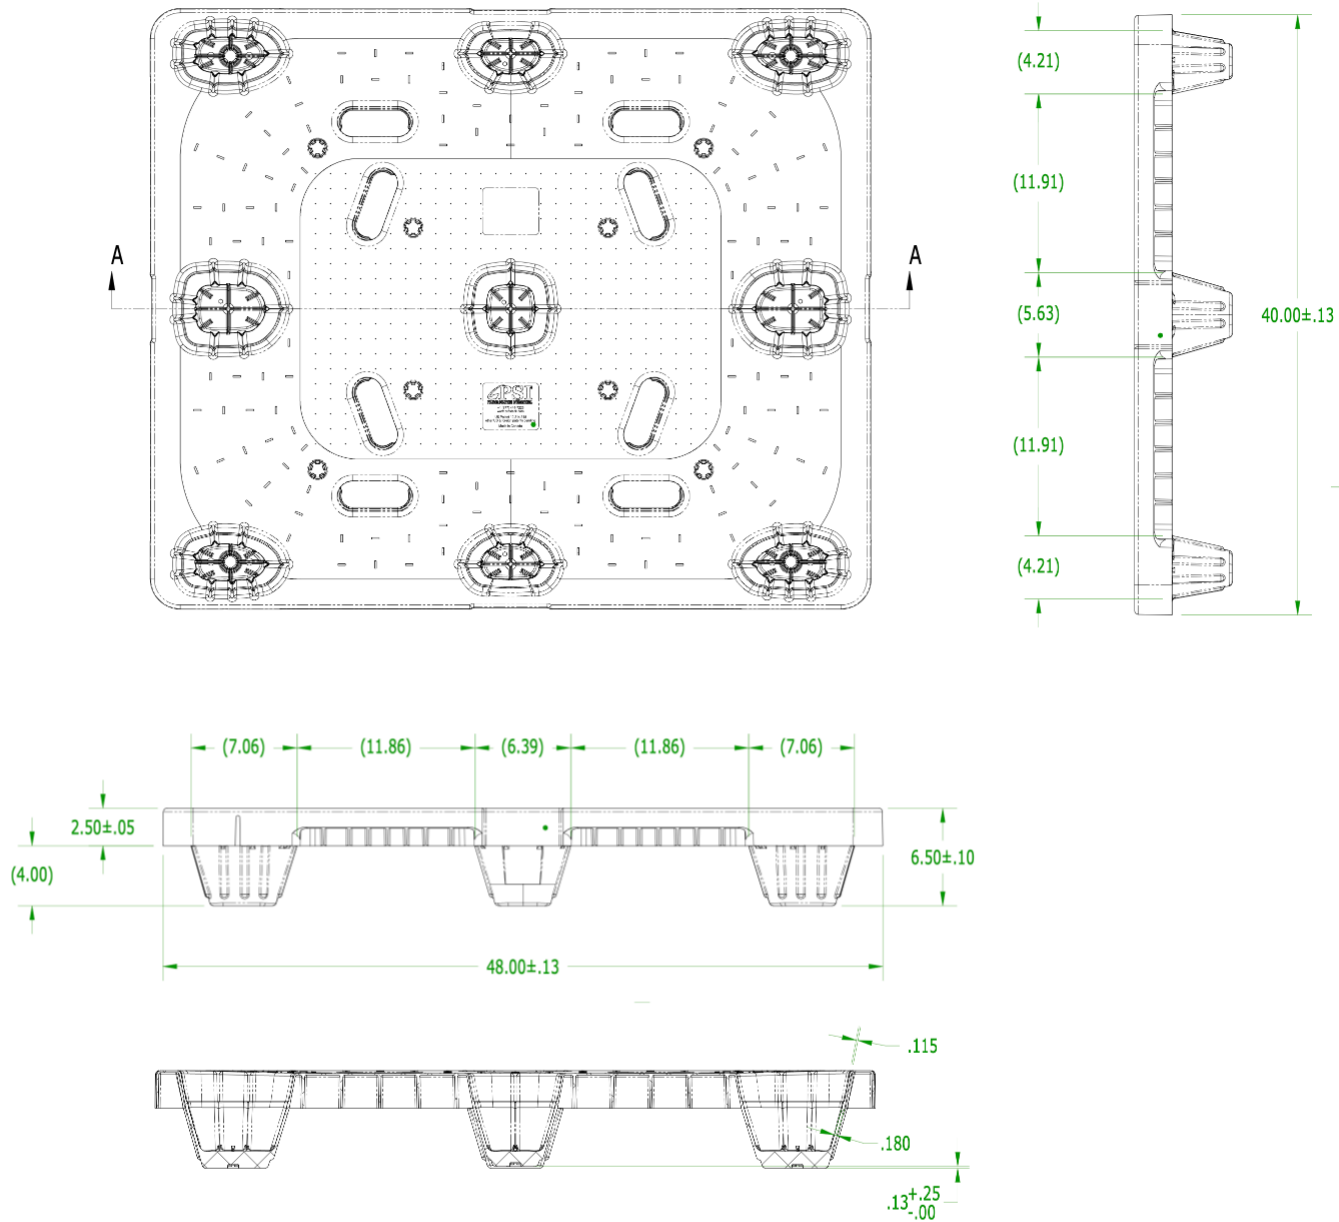

**Nelson**™

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Tech Sheet Generated On: 6/1/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.