

# CPP530/ACM

48x45

## Plastic Automotive Pallet



### Technical Data

Dimensions 48x45x5.5 inches (1219x1143x140 mm)  
Weight 24.0 lbs

#### Load Capacities

Static 8800 lbs  
Dynamic 3300 lbs  
Racking --

Entry 4-way  
Truckload Qty 1352  
Stack TL 52

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> Yes	<b>Reusability</b> One-Way	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> --	<b>Destination</b> Export	<b>Food Grade</b> No
<b>Rackable</b> No	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> --

### Materials and Colors

**Condition**  
New

**Material**  
ACM (Recycled)

**Color**  
Black

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
9 Feet - Nesting

**Available Options:**  
CPP530 - No skids (nestable)  
CPP533 - Snap-on skids\*  
\*Order with skids off for lower shipping cost

### Features

- Lightweight and low height
- Nesting saves storage & shipping costs
- Low-cost Plastic Pallet
- Standard size for automotive industry
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



**Nelson**<sup>TM</sup>

The Nelson Company  
(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# CPP530/ACM


48x45

Plastic Automotive Pallet





## Technical Drawings

0.2 in safety rim

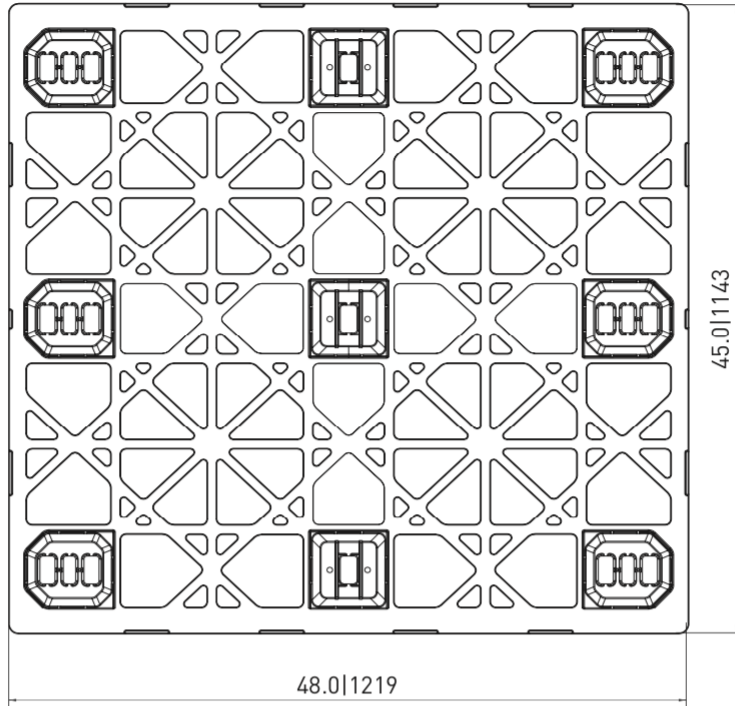

9F | 0.2 in safety rim

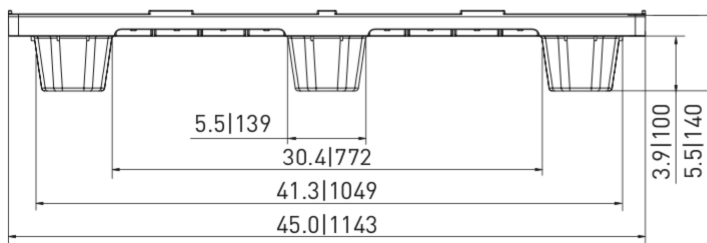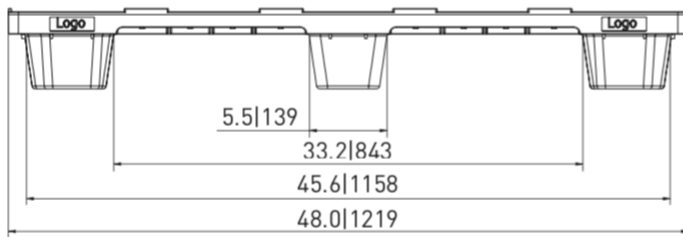

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Tech Sheet Generated On: 6/1/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.