


# NPP-4840-3R-PSG5.1

## 48x40 (Standard) Plastic Industrial Pallet

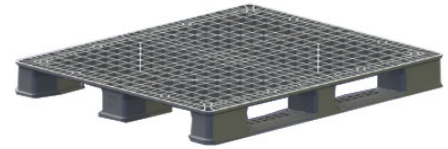

### Technical Data

Dimensions 48x40x5.13 inches (1219x1016x130 mm)  
Weight 33.5 lbs

#### Load Capacities


Static 20000 lbs  
Dynamic 4000 lbs  
Racking --

Entry 4-way  
Truckload Qty 600  
Stack TL 20


TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> No	<b>Reusability</b> Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> Yes	<b>Destination</b> Captive	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> --	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

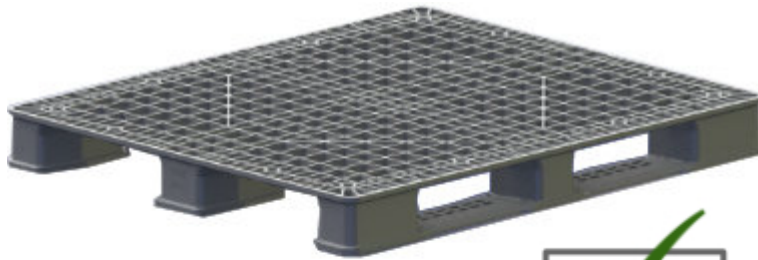

Bottom View

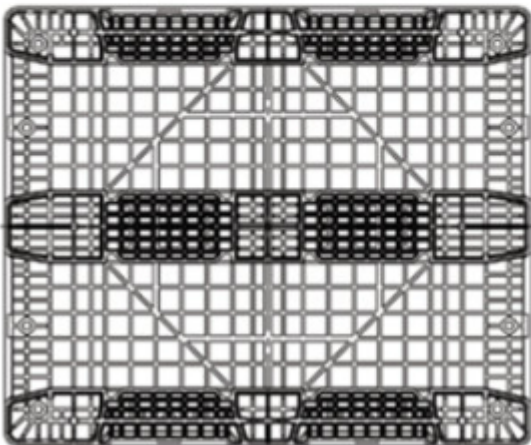

### Materials and Colors

**Condition**  
New

**Material** HDPE  
**Color** Blue, Gray, Black (and others)

(Virgin High-Density Polyethylene)

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
3 Runner - Unidirectional Long Side

Also available with full perimeter bottom

**Special Order Options:**  
Fire Retardant FM Approved non-deca BDE  
Anti-microbial additive  
Individual Markings  
Anti-Slip Grommets

### Features

Ideal for closed loops or distribution chains across industry sectors including Food, Retail, Medical and Pharmaceutical.

- 4,000 lbs Racking capacity in supported racks
- Low profile pallet allows for more product or box height
- One-piece design
- Hygienic, flow-through design
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

**Nelson**<sup>TM</sup>

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Spec Sheet Generated On: 4/18/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.