

# PS-4840-N-Dist

## 48x40 (Standard) Plastic Distribution Pallet



### Technical Data

Dimensions 48x40x6.5 inches (1219x1016x165 mm)  
Weight 29 lbs

#### Load Capacities

Static 30000 lbs  
Dynamic 3000 lbs  
Racking --

Entry 4-way  
Truckload Qty 1200  
Stack TL 40

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> Yes	<b>Reusability</b> One-Way & Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> --	<b>Destination</b> Captive & Export	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> No	<b>Airfreight</b> Yes	<b>Pharmaceutical</b> Yes

### Materials and Colors

**Condition**  
New

**Material** HDPE  
**Color** Black

(High-Density Polyethylene)

### Deck Specs

**Top Deck**  
Closed

**Bottom Deck**  
9 Feet - Nesting

Available Options:  
Coditherm Barcoding  
Grommets (top and bottom)  
Virgin Blue (PS-4840-N-DistFDA)

### Features

- Textured anti-slip surface
- Anchor notch for easy stretch wrap application
- Nesting saves storage & shipping costs
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Sanitary choice for strict drug manufacturing requirements
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



# Nelson™

The Nelson Company  
(443) 649-5294


[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)  
[www.NelsonCompany.com](http://www.NelsonCompany.com)  
[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# PS-4840-N-Dist

48x40 (Standard)  
Plastic Distribution Pallet



## Technical Drawings

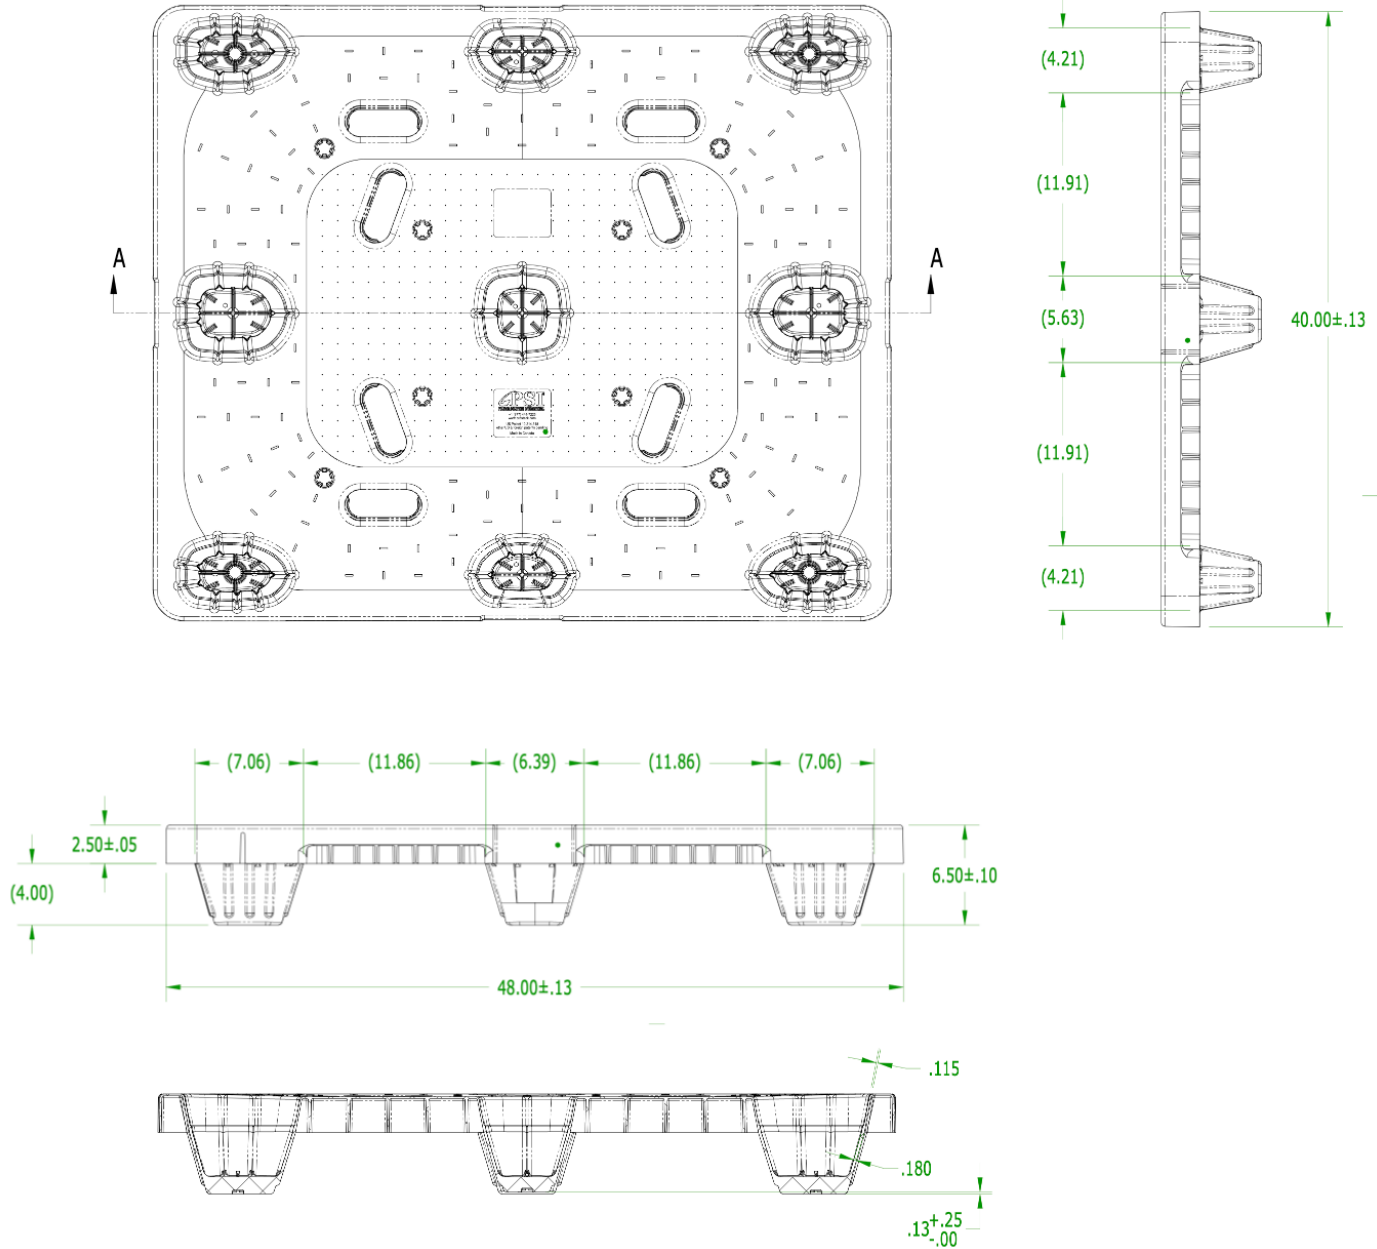

Tech Sheet Generated On: 6/9/2023  
Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

**Nelson**<sup>TM</sup>

The Nelson Company  
(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)  
[www.NelsonCompany.com](http://www.NelsonCompany.com)  
[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)