

# CPP306/PE

## 48x40 (Standard) Plastic Industrial Pallet



### Technical Data

Dimensions 47.24x39.37x6.29 inches (1200x1000x160 mm)  
Weight 33.0 lbs

#### Load Capacities

Static 8500 lbs  
Dynamic 4400 lbs  
Racking 650 lbs

Entry 4-way  
Truckload Qty 510  
Stack TL / LTL 17 / 15

TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

### Handling Data

<b>Nestable</b> No	<b>Reusability</b> One-Way & Multi-Trip	<b>ISPM-15 Exempt</b> Yes
<b>Stackable</b> Yes	<b>Destination</b> Captive	<b>Food Grade</b> Yes, non-FDA
<b>Rackable</b> Yes	<b>Airfreight</b> No	<b>Pharmaceutical</b> Yes

### Materials and Colors

**Condition**  
New

<b>Material</b> HDPE/PP (Recycled) HDPE/PP (Virgin*)	<b>Color</b> Black Gray/Custom*
--	---------------------------------------

(High-Density Polyethylene/Polypropylene)

\*Custom colors and markings available in virgin material.  
(Minimum quantities required.)

### Deck Specs

**Top Deck**  
Open

**Bottom Deck**  
6 Runner - Perimeter+2 Cross  
(cruciform perimeter base)

**Available Options:**  
CPP300 - No skids (nestable)  
CPP303 - 3 Runner snap-on skids\*  
CPP306 - 6 Runner snap-on skids\*  
\*Order with skids off for lower shipping cost

### Features

- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items  
(not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



**Nelson**<sup>TM</sup>

The Nelson Company  
(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)




[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

# CPP306/PE

48x40 (Standard)  
Plastic Industrial Pallet



## Technical Drawings

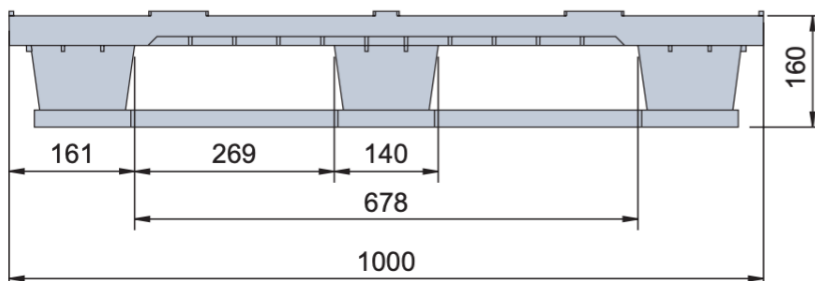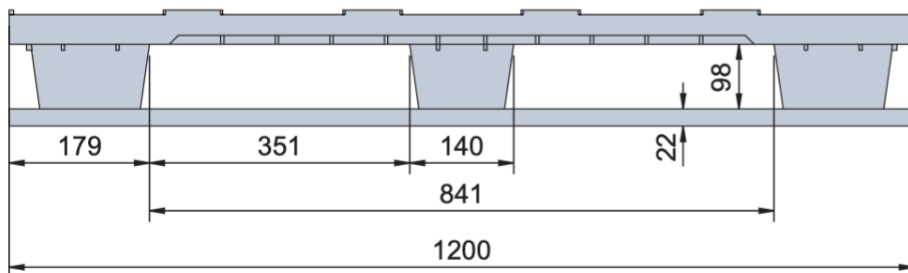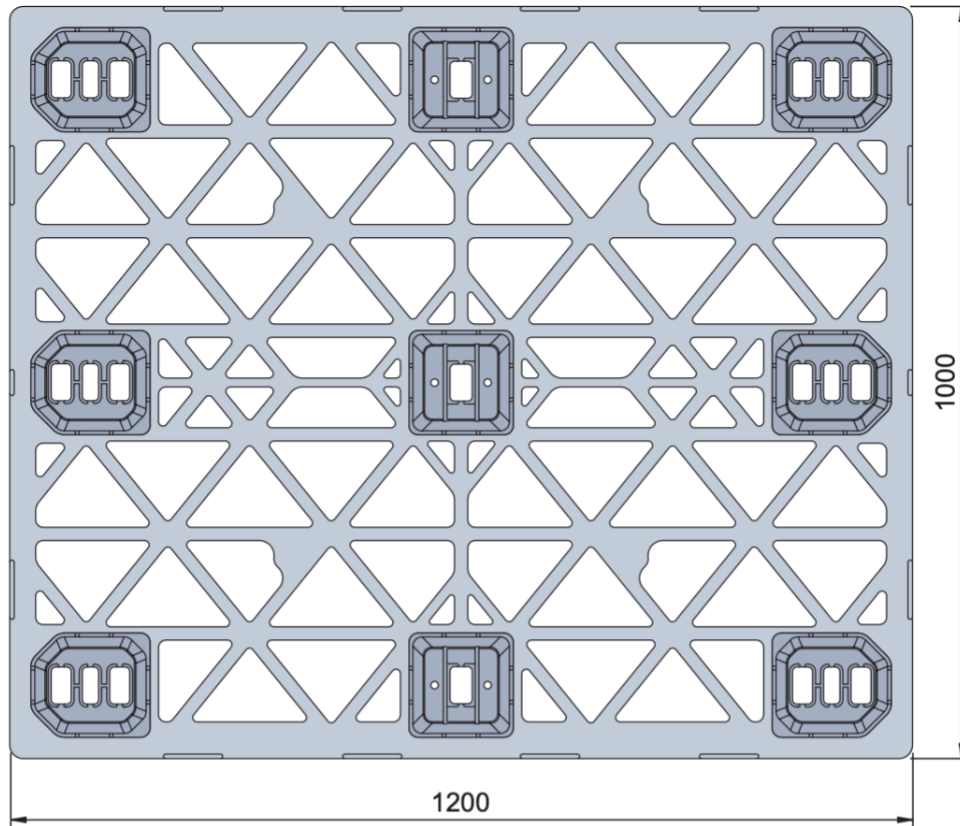

**Nelson**™

The Nelson Company

(443) 649-5294

[plastic@NelsonCompany.com](mailto:plastic@NelsonCompany.com)

[www.NelsonCompany.com](http://www.NelsonCompany.com)

[www.NelsonTechCenter.com](http://www.NelsonTechCenter.com)

Tech Sheet Generated On: 5/11/2025

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.