

CPP530/ACM

48x45

Plastic Automotive Pallet



Technical Data

Dimensions 48x45x5.5 inches (1219x1143x140 mm)
Weight 24.0 lbs

Load Capacities

Static 8800 lbs
Dynamic 3300 lbs
Racking --

Entry 4-way
Truckload Qty 1352
Stack TL 52

TL (truckload) quantities are approximate and may vary by transport equipment or other factors.

Handling Data

Nestable Yes	Reusability One-Way	ISPM-15 Exempt Yes
Stackable --	Destination Export	Food Grade No
Rackable No	Airfreight Yes	Pharmaceutical --

Materials and Colors

Condition
New

Material
ACM (Recycled)

Color
Black

Deck Specs

Top Deck
Open

Bottom Deck
9 Feet - Nesting

Available Options:
CPP530 - No skids (nestable)
CPP533 - Snap-on skids*
*Order with skids off for lower shipping cost

Features

- Lightweight and low height
- Nesting saves storage & shipping costs
- Low-cost Plastic Pallet
- Standard size for automotive industry
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations



NelsonTM

The Nelson Company
(443) 649-5294

plastic@NelsonCompany.com

www.NelsonCompany.com

www.NelsonTechCenter.com

Spec Sheet Generated On: 4/25/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.

CPP530/ACM


48x45

Plastic Automotive Pallet





Technical Drawings

0.2 in safety rim

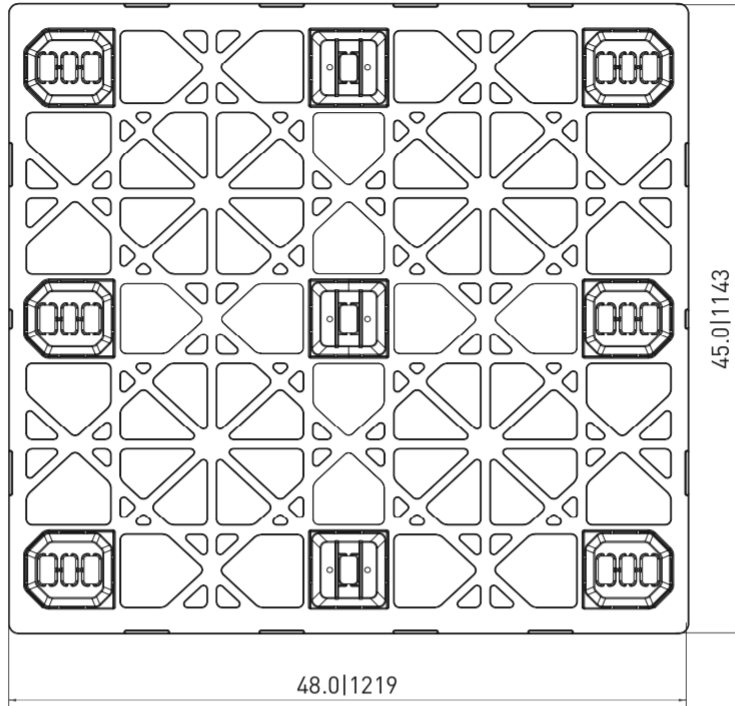

9F | 0.2 in safety rim

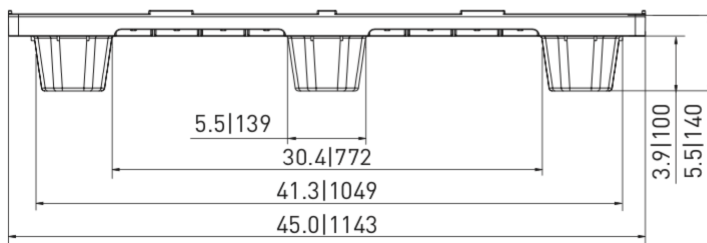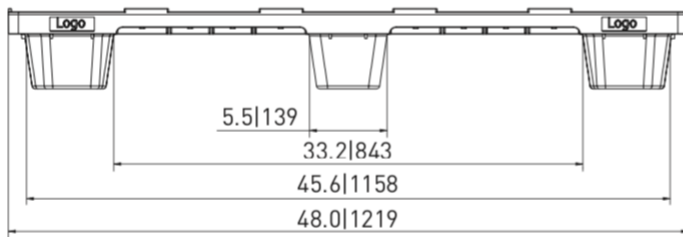

NelsonTM

The Nelson Company

(443) 649-5294

plastic@NelsonCompany.com

www.NelsonCompany.com

www.NelsonTechCenter.com

Tech Sheet Generated On: 4/25/2024

Specs subject to change without notice. Provided for informational purposes only. Technical data are guideline values and may vary based on intended use, features, raw materials and environment. Nothing shall be construed as warranties or guarantees, express or implied, regarding products or their use, application, performance or otherwise.