


UP-4840-FP-130mm30lbs

48x40 (Standard) Plastic Industrial Pallet

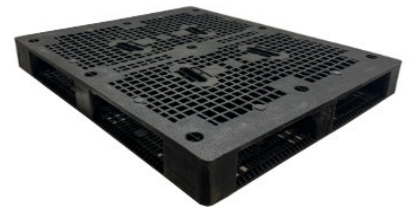

Technical Data

Dimensions 48.0x40.0x5.1 inches (1219x1016x130 mm)
Weight 30 lbs

Load Capacities


Static 30000 lbs
Dynamic 3000 lbs
Racking 3000 lbs

Entry 4-way
Truckload Qty 540
Stack TL / LTL -- / 18

Load capacities for used pallets may be unavailable or may have changed since issued. Unit load Sample Tests (ST) are recommended to confirm successful use with specific applications and equipment. TL (truckload) and LTL (less-than-truckload) quantities are approximate and may vary by transport equipment or other factors.

Handling Data

Nestable No	Reusability One-Way & Multi-Trip	ISPM-15 Exempt Yes
Stackable Yes	Destination Captive & Export	Food Grade Yes, non-FDA
Rackable Yes	Airfreight No	Pharmaceutical Yes

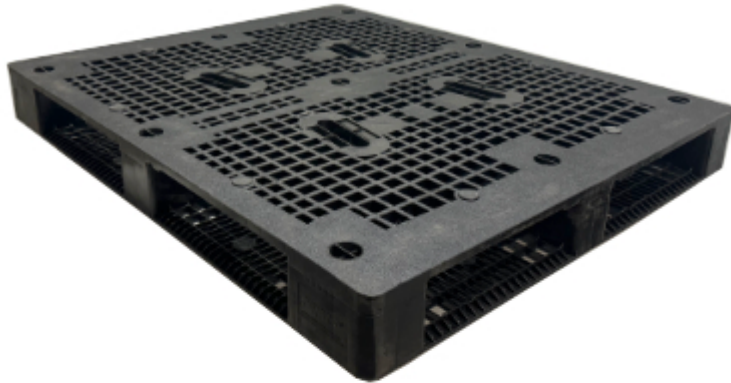

Materials and Colors

Condition
Used

Material
HDPE/PP

Color
Black

(High-Density Polyethylene/Polypropylene)

All used pallets have been inspected and cleaned. Pallets may have limited cosmetic damage, but all are structurally sound.

Deck Specs

Top Deck
Open

Bottom Deck
6 Runner - Perimeter+2 Cross
(cruciform perimeter base)

Features

- Flow-through design reduces contaminant spaces and allows easy cleaning and drying
- Molded-in deck pads support multiple box layout configurations to protect box corners
- Low profile 5.1" height optimized for double stacking in racks and truckloads
- Comfortable hand holds for easy manual handling
- Allows for safe double stacking
- Easy-to-clean hygienic design
- Suitable for packaged food items
(not approved for direct food contact)
- Impervious to acids, fats, solvents and odors
- Resists water absorption & bacteria growth
- Inert to infestation, mold and mildew
- Consistently dimensionally accurate
- Exempt from ISPM 15 shipping regulations

NelsonTM

The Nelson Company

(443) 649-5294

plastic@NelsonCompany.com

www.NelsonCompany.com

www.NelsonTechCenter.com